



CPD20TVL

3-WHEEL DUAL-DRIVE COUNTERBALANCE FORKLIFT 2,000 KG

2000 kg 6000 mm 80 V Li-Ion



Narrow aisles: This counterbalance forklift is suitable for a range of applications including indoor warehousing and narrow-aisle operations, with a turning radius from 1,450 mm (CPD15TVL) to 1,585 mm (CPD20TVL).

Loading/unloading: It delivers excellent performance for loading and unloading at docks or side-bay lorries, powered by its robust 80 V battery. Ideal for the rental market thanks to its opportunity-charging capability.

SPECIFICATION	REF	UNIT	VALUE
Battery type			Li-Ion
Battery nominal capacity		Ah	205
Battery voltage		V	80
Load capacity	Q	kg	2000
Load centre distance	c	mm	500
Service weight		kg	3429
Retracted mast height	h_1	mm	2075
Lift height	h_3	mm	3000
Height, mast extended	h_4	mm	4055
Overall length		mm	3020
Overall width	b_1/b_2	mm	1170
Length to face of forks	l ₂	mm	1950
Fork dimensions	s/e/l	mm	40X122X1070
Turning radius		Wa	1585
Operator type			Seated
Load distance, centre of drive axle to fork		mm	420

Features

80 V system delivering powerful performance

The 80-volt 2×5.0 kW dual-drive motors offer higher power efficiency than conventional 48-volt systems, enabling the TVL series to deliver up to 6 hours of operation per charge.



Spacious workspace

Thanks to the compact EP lithium battery and the ergonomic layout of the control levers and foot brake pedal, the compact truck provides generous legroom of 394 mm and excellent operator comfort.

Compact truck size

The TVL series features a small turning radius — 1,450 mm for the CPD15TVL, 1,550 mm for the CPD18TVL and 1,585 mm for the CPD20TVL — making it an ideal workhorse for small warehouses with narrow aisles up to 3.5 m wide.



Integrated charger

The TVL series forklift is fitted with an EP Li-ion battery and a 35 A single-phase integrated charger with a 16 A plug, allowing charging from most power outlets (except 10 A and 13 A domestic plugs in Switzerland and the UK).

Enhanced mast for optimal visibility & stability

The TVL series uses the same high-strength mast as the CPD20L2, providing excellent all-round visibility and strong stability with reduced wobble even when fully loaded.




VDI Chart

	SPECIFICATION	REF	UNIT	VALUE
1.4	Operator type			Seated
1.5	Load capacity	Q	kg	2000
1.6	Load centre distance	c	mm	500
1.8	Load distance, centre of drive axle to fork		mm	420
1.9	Wheelbase		mm	1330
2.1	Service weight		kg	3429
2.2	Axle loading, laden front/rear		kg	4745/684
2.3	Axle loading, unladen front/rear		kg	1359/2070
3.1	Tyre type			Solid rubber
3.2	Tyre size, front		mm	200/50-10
3.3	Tyre size, rear		mm	140/55-9
3.5	Wheels, number front/rear (x=drive wheels)			2X/2
3.6.1	Tread width, front	b_{10}	mm	969
3.7.1	Tread width, rear	b_{11}	mm	210
4.0	Max lift height	H	mm	6000
4.1	Tilt of mast/fork carriage forward/backward		°	6/6
4.12	Tow coupling height		mm	600
4.19	Overall length		mm	3020
4.2	Retracted mast height	h_1	mm	2075
4.20	Length to face of forks	l ₂	mm	1950
4.21	Overall width	b_1/b_2	mm	1170
4.22	Fork dimensions	s/e/l	mm	40X122X1070
4.23	A,B Fork carriage class/type A, B			2A
4.24	Fork carriage width		mm	1040
4.3	Free lift		mm	100
4.31	Ground clearance, laden, below mast		mm	89

SPECIFICATION	REF	UNIT	VALUE	
4.32	Ground clearance, centre of wheelbase	mm	92	
4.34.1	Aisle width for pallets 1000×1200 crossways	Ast	3315	
4.34.2	Aisle width for pallets 800×1200 lengthways	Ast	3435	
4.35	Turning radius	Wa	1585	
4.4	Lift height	h ₃	mm	3000
4.5	Height, mast extended	h ₄	mm	4055
4.7	Height of overhead guard (cabin)	mm	2078	
4.8	Seat height/standing height	mm	1050	
5.1	Travel speed, laden/unladen	km/h	13/14	
5.10	Service brake		Hydraulic	
5.11	Parking brake		Mechanical	
5.2	Lifting speed, laden/unladen	m/s	0.33/0.4	
5.3	Lowering speed, laden/unladen	m/s	0.38/0.4	
5.8	Max. gradeability, laden/unladen	%	10/15	
6.1	Drive motor rating S2 60 min	kW	5.0X2	
6.2	Lift motor rating at S3 15%	kW	11	
6.4	Battery nominal capacity	Ah	205	
6.4	Battery voltage	V	80	
6.4.1	Battery type		Li-Ion	
6.5	Battery weight	kg	165	
8.1	Type of drive control		AC	
10.5	Steering design		Hydraulic	
10.7	Sound pressure level at the drivers ear	dB(A)	74	

RATED CAPACITIES AND LOAD CENTERES GRAPH

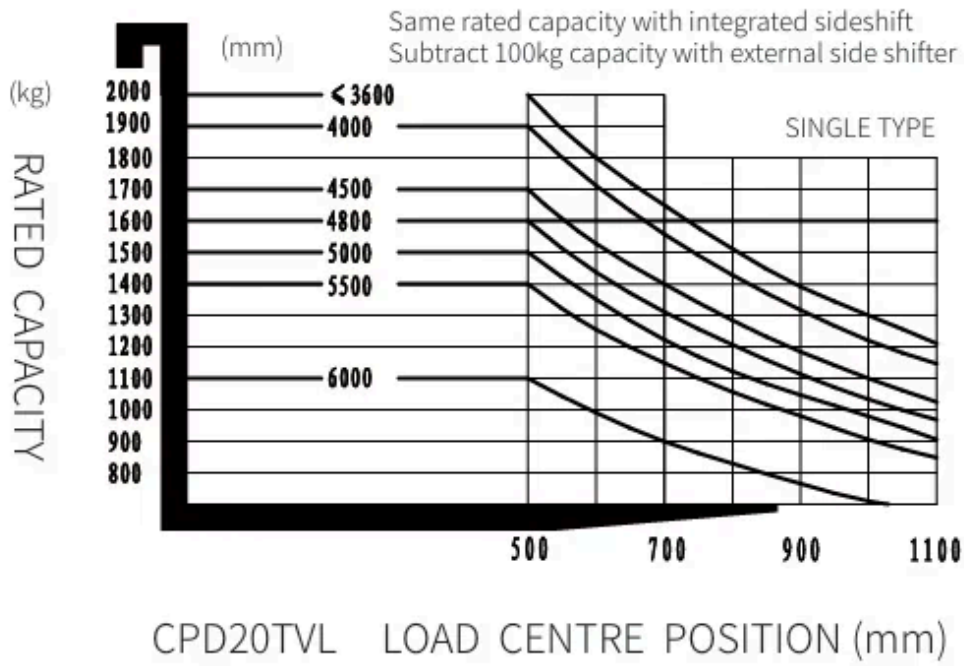

Mast Options

MAST TYPE	LIFT HEIGHT (H3, MM)	MAST LOWERED HEIGHT (H1, MM)	MAST EXTENDED HEIGHT, NO BACKREST (H4, MM)	MAST EXTENDED HEIGHT, WITH BACKREST (H4, MM)	FREE LIFT HEIGHT, NO BACKREST (H2, MM)	FREE LIFT HEIGHT, WITH BACKREST (H2, MM)
2-Standard Mast	3000	2075	3740	4055	100	100
2-Standard Mast	3600	2375	4340	4655	100	100
2-Standard Mast	4000	2455	4740	5055	100	100
3-Free Mast	4500	2140	5240	5555	1430	1115
3-Free Mast	4800	2240	5540	5855	1530	1215
3-Free Mast	5000	2305	5740	6055	1595	1280
3-Free Mast	5500	2475	6240	6555	1765	1450
3-Free Mast	6000	2690	6740	7055	1980	1665

Options

ITEM	OPTIONS (optional items marked in yellow)
Fork dimension	122*40*1070 122*40*920 122*40*1150 122*40*1220 122*40*1370 122*40*1500 122*40*1600 122*40*1700 122*40*1820 122*40*1900 122*40*2000 122*40*2200
Fork carriage width option	1040mm Yes and can be customized
Seat type	Regular Premium Suspension Suspension+seatbelt logic switch
Attachments	No Built-in sideshifter External shifter Adjustable fork
Traction pin	Yes
Front wheel material	Solid Non-marking solid
Battery capacity	150Ah 205Ah 280Ah
Charger	80V-35A single-phase integrated 80V-60A 3-phase integrated 80V-35A single-phase external 80V-65A 3-phase external 80V-100A 3-phase external
Battery display indicator (BDI)	With hourmeter
Area warning lamp	No 1 left + 1 right (Red)
Rearview mirror	1 in the middle Add 1 rearview mirror on both sides
Buzzer	YES
OPS system	YES
Telematics	No Yes and not customized
Front lamp	LED
Rear lamp	No LED
Warning lamp	YES
Blue lamp	No 2 front 1 rear 2 front+ 1 rear
Cabin	No